

Link-Belt®

C R A N E S

65 RT

65-TON | 60 MT ROUGH TERRAIN CRANE

**Remarkable control, reliability,
and capacity performance**

- ✓ 38-115 FT | 11.6-35 M 4-SECTION FULL POWER BOOM
- ✓ OPTIONAL 35-58 FT | 10.7-17.7 M TWO-PIECE MANUALLY OFFSETABLE FLY
- ✓ NO DEDUCTS FOR STOWED ATTACHMENTS
- ✓ OPTIONAL TWO 16 FT (4.9M) LATTICE FLY EXTENSIONS [TOTAL ATTACHMENT LENGTH OF 90 FT (27.4M)]
- ✓ MAXIMUM TIP HEIGHT: 211.7 FT | 64.5 M
- ✓ WINCH LINE PULL: 16,883 LBS | 75.1 KN
- ✓ SIMPLE OPERATION – 2 BOOM EXTEND MODES
- ✓ TRANSPORTS AT UNDER 92,000 LBS | 41 730 KG FULLY RIGGED
- ✓ 4-LINK REAR SUSPENSION WITH OPTIONAL HYDRO-GAS RIDE
- ✓ VISION PACKAGE – 3 ON-BOARD CAMERAS
- ✓ 6 POINTS OF ACCESS TO CARRIER DECK
- ✓ LINK-BELT PULSE RCL SYSTEM

Link-Belt
PULSE

NEW Standard Features Include:

- Air conditioning
- Full LED lighting package
- Tie-off anchors for fall protection
- Hydraulic hose reel for boom telescope
- Textured paint
- Flat steel deck design with slip resistant walking surfaces
- Wireless anemometer



65RT *Service and maintenance just got easier!*

65-TON | 60 MT ROUGH TERRAIN CRANE

DESIGNED FOR EASY ENGINE ACCESS AND SERVICE

- 270 HP Cummins QSB6.7L Tier 4 Final/Stage IV or Tier 3/Stage IIIA diesel engine
- Remote mounted transmission oil, engine oil, and fuel filters
- Lockable engine compartment
- 12-volt electrical system
- CANBUS diagnostic network
- Greaseless 4-link rear suspension
- Serviceable pontoons



Swing-out doors and removable panels provide exceptional access to engine components.



Confined Area Lifting Capabilities (CALC)™ for tight operating spaces.



STANDARD OPERATOR'S CAB FEATURES

- Wide ergonomic spacious cab
- Air conditioning
- Extra large windows throughout cab
- Time delayed wipers
- Bluetooth™ AM/FM radio integrated with NOAA weather radio
- Internal rated capacity limiter light bar
- Single or dual axis hydraulic controllers
- All gauges and switches are back-lit for superior visibility in low light conditions




TRANSPORT WEIGHT OF LESS THAN 92,000 LBS | 41 730 KG INCLUDES:

- Main & aux winches with wire rope & cable followers
- 35'-58' | 10.7-17.7 m 2-piece offset-able fly stowed
- 12,000 lbs | 5.4 mt full counterweight
- 60 ton | 55 m hook block
- 8 ton | 7.3 mt hook ball
- Auxiliary lifting sheave
- Cab flood lights

SEE MORE WITH LINK-BELT'S VISION PACKAGE



Camera display

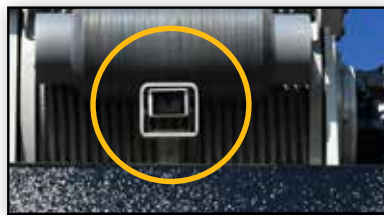

Rear viewing camera



Swing viewing camera



Winch viewing camera

Link-Belt

C R A N E S

Link-Belt Cranes | Lexington, Kentucky
www.linkbelt.com

© Link-Belt is a registered trademark. Copyright 2024. All rights reserved. We reserve the right to change designs and specifications at any time. Litho in U.S.A. 4407 1/24 #XXXX